

EASTFINE®

2025
CATALOG

EAST LED
FINE QUALITY



GUANGDONG YUCHEN
OPTOELECTRONIC TECHNOLOGY CO.LTD

Yutong Industrial Park, Liyuan Road, Zhangmutou
town, Dongguan City, Guangdong Province

+86 0769-8293 3110

eastfine@eastfineled.com
www.eastfineled.com


CONTENTS

COMPANY

- P03 Company Profile
- P05 Laboratory & Factory
- P07 Certificates & Product Application


PRODUCTS

LED Neon Flex




Top View Series

Top View-L:16x15		Page 11
Top View-M:12x12		Page 13
Top View-S:10x10		Page 15
Top View-L:16X15 CT		Page 17



Side View Series

Side View-L:11x20		Page 19
Side View-L:16x15		Page 21
Side View-M:8x15		Page 23
Side View-S:10x10		Page 25
Side View-S:6X12		Page 27
Side View-L: 12X20 FA		Page 29




3-Face View Series

3-Face View-Mini:10x6		Page 31
3-Face View-S: 10x10		Page 33
3-Face View-M:14x12		Page 35
3-Face View-L:16x15		Page 37

Flexible LED Wall Washer Light


2835-40D-22MM		Page 41
5050CCT-42D-22MM		Page 42

5050RGB-36D-22MM




Page 43

5050RGBW-30D-22MM




Page 44

2835-42D-20MM(Transparent Model)



Page 45


2835-56D-14MM(Mini Model)



Page 46


Lumileds SMD2835 LED Strip

2835-120D-8mm-24V(Standard Model)

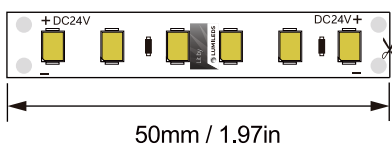

Page 49

2835-140D-10mm-24V(Performance Model)

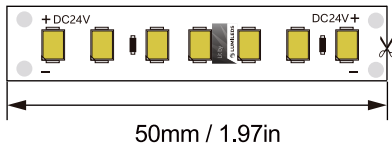

Page 50



ABOUT EASTFINE

Guangdong Yuchen Optoelectronic Technology Co.Ltd is located in a vigorous and innovative city Dongguan well-known city named World Factory. We focus on R&D and manufacturing high-rank LED strip light and neon light. The company is running under an independent brand EASTFINE in Chinese,USA and EU markets.

EASTFINE is devoted to interior and exterior LED linear lighting for the world. The key product IP68 strip lights are applicable in exterior landscape illumination and marine lighting, and the production artwork is much different but higher than traditional methods. All the products are CE,ROHS,ETL approved.

We also passed the latest version ISO9001:2015 quality system to meet the demand from American, European, Australian,middle east and South Asian markets.



RoHS



EMC/LVD



LABORATORY

The professional laboratory is equipped with UV, constant temperature and humidity, Salt Spray, IP68 Waterproof, cold and hot impact and other inspection and test instruments. At the same time, the company is equipped with professional test operators and quality management team.



FACTORY


We have complete LED light strip production lines, including automatic production equipment required in the process of SMD, welding, PCB splitting, glue dropping, glue filling, aging test and so on.

While providing customers with high-quality products, we continue to improve the automation of the whole production process and improve production efficiency. At present, the production capacity of LED strip light reaches 200,000-300,000 meters every month.



CERTIFICATE

- CE-EMC Certificate
- CE-LVD Certificate
- ETL Certificate
- ISO9001: 2015

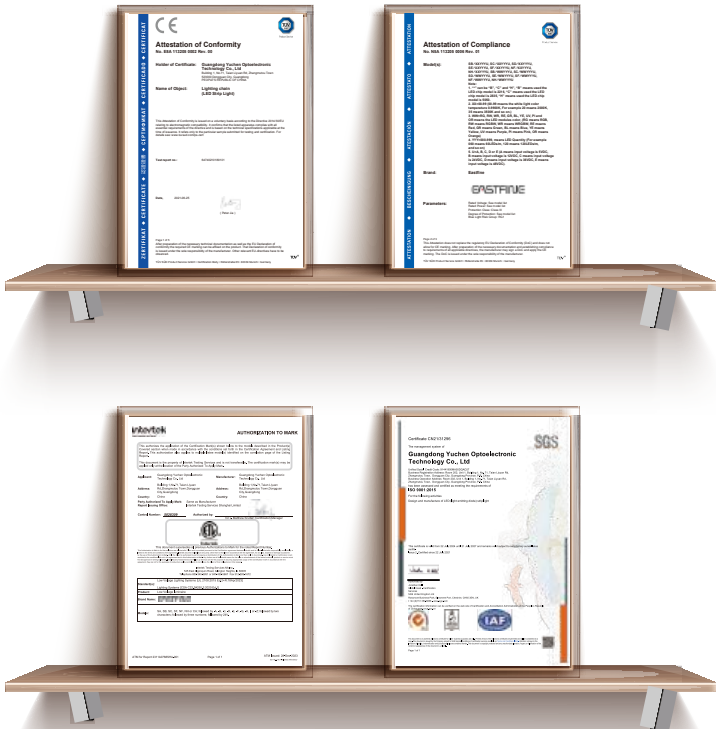

- IP68 Certificate
- IK08 Certificate
- ROHS Certificate
- UKCA Certificate



- EU Trademark Certificate
- U.S. Trademark Certificate
- Patent Certificate 1
- Patent Certificate 2



APPLICATION & PROJECT

POOL LIGHTING



CRUISES LIGHTING



SHOPPING MALL LIGHTING



UNDERWATER LIGHTING



ARCHITECTURAL LIGHTING



PU NEON

PU material, it's resistant to yellowing, high temperature, corrosion, weak acid and alkali, and has great flexibility. so that it has strong adhesion, good durability and high reliability.



UV
Protected



Waterproof
IP68



Saltwater
Resistant



Resistant
to Solvents


LED Neon Flex Series

Top View-L: 16X15

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

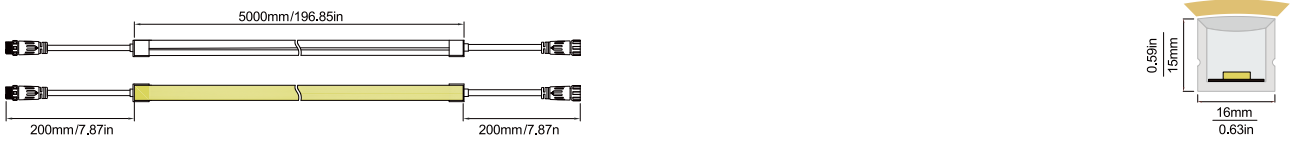

Installation Accessories

- JA0004

304SS+6063AL Pop-Up Profile
1000*20.5*17.3mm
- JK0006

304SS+6063AL Pop-Up Clip
40*20.5*17.3mm
- JA0038

6063 Aluminum Profile
1000*19*21.5mm
- JK0005

6063 Aluminum Clip
30*18.3*18mm
- JL0004


Flexible Stainless Steel Profile
1000*17.3*16.44mm
- JD0019

End Cap Without Hole
18.2*17.5*11.5mm


Application



Connection Methods

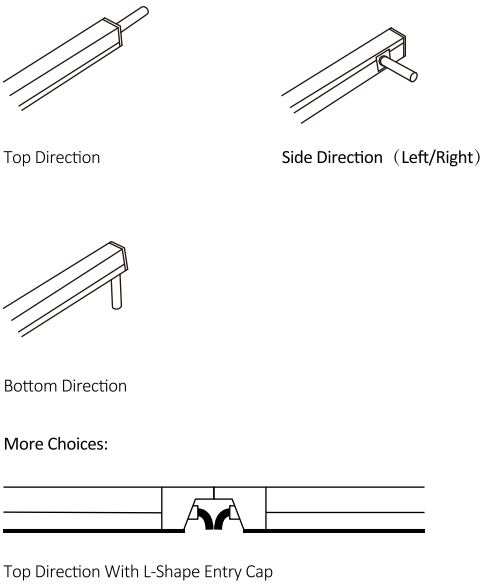

Luminaire Photometric Data

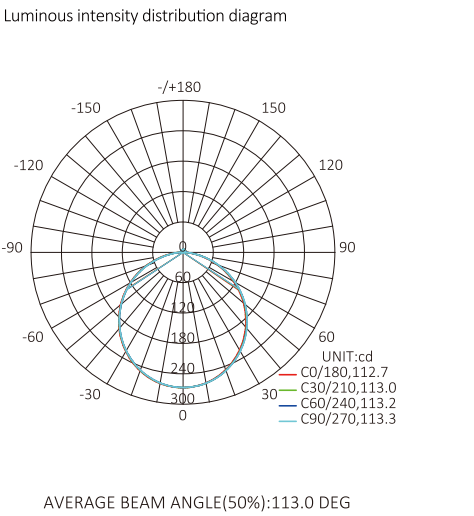

Datasheet

Model N o.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27140C-C	2700K	2835	140	2600-2800	12.0	1113	90	50	10	15M
NF-C30140C-C	3000K	2835	140	2850-3300	12.0	1130	90	50	10	15M
NF-C40140C-C	4000K	2835	140	3850-4400	12.0	1159	90	50	10	15M
NF-C50140C-C	5000K	2835	140	4800-5400	12.0	1174	90	50	10	15M
NF-C65140C-C	6500K	2835	140	5600-7000	12.0	1187	90	50	10	15M
NF-CRE140C-C	Red	2835	140	620-625nm	12.0	335	—	50	10	15M
NF-CGR140C-C	Green	2835	140	520-525nm	12.0	450	—	50	10	15M
NF-CBL140C-C	Blue	2835	140	460-465nm	12.0	240	—	50	10	15M
NF-CYE140C-C	Yellow	2835	140	590-595nm	12.0	740	—	50	10	15M
NF-CP1140C-C	Pink	2835	140	-	12.0	672	—	50	10	15M
NF-COR140C-C	Orange	2835	140	600-610nm	12.0	300	—	50	10	15M
NF-CTW240C-C	WW-CW	2835	240	2700-6500	2*8	720	90	50	10	12M
NF-HRG070C-C	RGB	5050	70	RGB	12.0	480	—	100	10	10M
NF-HRW070C-C	RGBW	5050	70	RGBW	15.0	620	—	100	12	7.5M

LED Neon Flex Series

Top View-M: 12X12

High quality and high brightness SMD LED chip.

Environmentally friendly&energy efficient.

High color consistency&smooth illumination With invisible light dots.

Perfect softness,gentle emitting,Not dazzling.



Specifications




Installation Accessories

JA0005		6063 Aluminum Profile 1000*14*14.5mm
JK0007		6063 Aluminum Clip 30*14*14.5mm
JL0006		Flexible Stainless Steel Profile 1000*13*9.9mm
JK0026		304 Stainless Steel Clip 15*12.5*8.75mm
JD0029		End Cap Without Hole 14.5*14.5*13.5mm
JJ0009		K-5905 Glue Transparent 45g/PCS


Application




Connection Methods

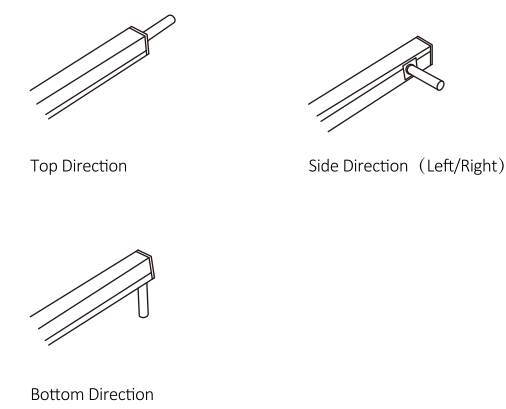

Luminaire Photometric Data

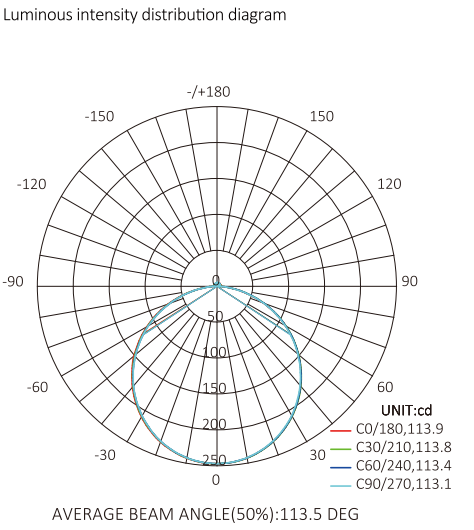

Datasheet



Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27140C-BT	2700K	2835	140	2600-2800	10.0	927	90	50	8	12M
NF-C30140C-BT	3000K	2835	140	2850-3300	10.0	932	90	50	8	12M
NF-C40140C-BT	4000K	2835	140	3850-4400	10.0	935	90	50	8	12M
NF-C50140C-BT	5000K	2835	140	4800-5400	10.0	940	90	50	8	12M
NF-C65140C-BT	6500K	2835	140	5600-7000	10.0	940	90	50	8	12M
NF-CRE140C-BT	Red	2835	140	620-625nm	10.0	318	—	50	8	12M
NF-CGR140C-BT	Green	2835	140	520-525nm	10.0	403	—	50	8	12M
NF-CBL140C-BT	Blue	2835	140	460-465nm	10.0	210	—	50	8	12M
NF-CYE140C-BT	Yellow	2835	140	590-595nm	10.0	689	—	50	8	12M
NF-CPI140C-BT	Pink	2835	140	-	10.0	650	—	50	8	12M
NF-COR140C-BT	Orange	2835	140	600-610nm	10.0	273	—	50	8	12M
NF-CTW120C-BT	WW-CW	2835	120	2700-6500	2*8	685	90	50	8	10M
NF-GRG120C-BT	RGB	3535	120	RGB	12.0	452	—	50	8	7.5M

LED Neon Flex Series

Top View-S: 10X10

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Notdazzling.



Specifications



Installation Accessories


JA0026		6063 Aluminum Profile 1000*11.9*14mm
JK0018		6063 Aluminum Clip 30*11.9*14mm
JL0003		Flexible Stainless Steel Profile 1000*10.9*10.03mm
JK0014		304 Stainless Steel Clip 8*11.94*7.5mm
JD0003		End Cap Without Hole 12*12*8mm
DX0092 DX0097		M10 Male&Female Connector 2464 20AWG φ4.0 Cables

Application




Luminaire Photometric Data

Luminous intensity distribution diagram

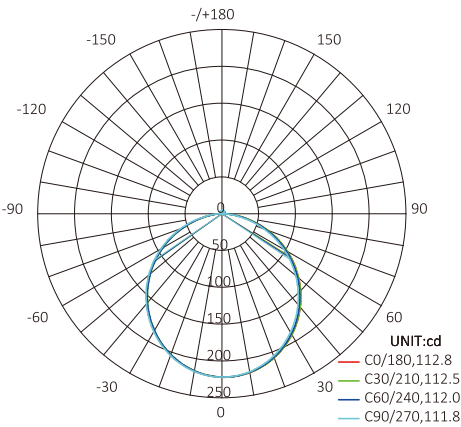


AVERAGE BEAM ANGLE(50%):112.3 DEG

Connection Methods

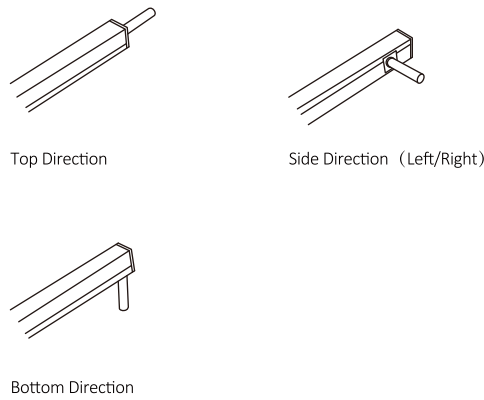

Datasheet



Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27144C-AT	2700K	2835	144	2600-2800	10.0	700	90	41.67	6	12M
NF-C30144C-AT	3000K	2835	144	2850-3300	10.0	710	90	41.67	6	12M
NF-C40144C-AT	4000K	2835	144	3850-4400	10.0	720	90	41.67	6	12M
NF-C50144C-AT	5000K	2835	144	4800-5400	10.0	720	90	41.67	6	12M
NF-C65144C-AT	6500K	2835	144	5600-7000	10.0	710	90	41.67	6	12M
NF-CRE144C-AT	Red	2835	144	620-625nm	10.0	225	—	41.67	6	12M
NF-CGR144C-AT	Green	2835	144	520-525nm	10.0	289	—	41.67	6	12M
NF-CBL144C-AT	Blue	2835	144	460-465nm	10.0	163	—	41.67	6	12M
NF-CYE144C-AT	Yellow	2835	144	590-595nm	10.0	378	—	41.67	6	12M
NF-CPI144C-AT	Pink	2835	144	-	10.0	386	—	41.67	6	12M
NF-COR144C-AT	Orange	2835	144	600-610nm	10.0	208	—	41.67	6	12M
NF-CTW120C-AT	WW-CW	2835	120	2700-6500	2*8	465	90	50	6	10M
NF-GRG120C-AT	RGB	3535	120	RGB	12.0	323	—	50	6	7.5M


LED Neon Flex Series

TopView-L : 16X15 CT

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

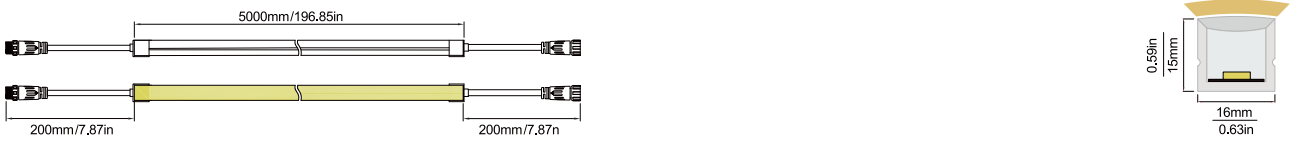


Installation Accessories

JA0004		304SS+6063AL Pop-Up Profile 1000*20.5*17.3mm
JK0006		304SS+6063AL Pop-Up Clip 40*20.5*17.3mm
JA0038		6063 Aluminum Profile 1000*19*21.5mm
JK0005		6063 Aluminum Clip 30*18.3*18mm
JL0004		Flexible Stainless Steel Profile 1000*17.3*16.44mm
JD0019		End Cap Without Hole 16.2*15.5*10mm


Application



Connection Methods

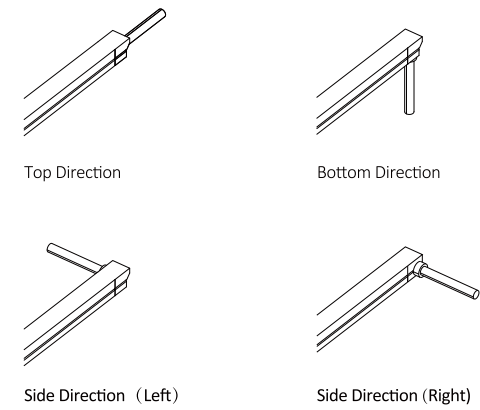

Luminaire Photometric Data

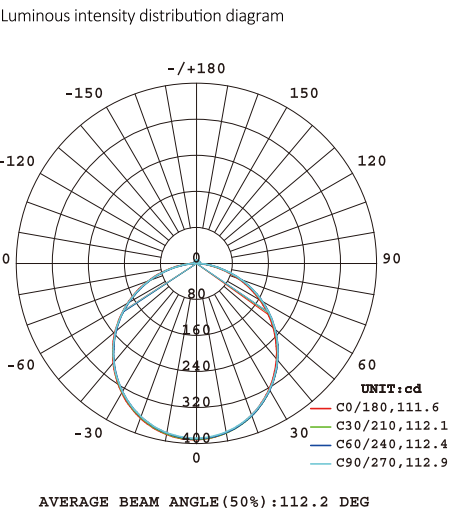

Injection Molded Integrated End Cap & Cable



Datasheet

Model N o.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27140C-CT	2700K	2835	140	2600-2800	12.0	1080	90	50	10	15M
NF-C30140C-CT	3000K	2835	140	2850-3300	12.0	1096	90	50	10	15M
NF-C40140C-CT	4000K	2835	140	3850-4400	12.0	1123	90	50	10	15M
NF-C50140C-CT	5000K	2835	140	4800-5400	12.0	1138	90	50	10	15M
NF-C65140C-CT	6500K	2835	140	5600-7000	12.0	1150	90	50	10	15M
NF-CRE140C-CT	Red	2835	140	620-625nm	12.0	322	—	50	10	15M
NF-CGR140C-CT	Green	2835	140	520-525nm	12.0	435	—	50	10	15M
NF-CBL140C-CT	Blue	2835	140	460-465nm	12.0	232	—	50	10	15M
NF-CYE140C-CT	Yellow	2835	140	590-595nm	12.0	717	—	50	10	15M
NF-CP1140C-CT	Pink	2835	140	-	12.0	650	—	50	10	15M
NF-COR140C-CT	Orange	2835	140	600-610nm	12.0	290	—	50	10	15M
NF-CTW240C-CT	WW-CW	2835	240	2700-6500	2*8	698	90	50	10	12M
NF-HRG084C-CT	RGB	5050	84	RGB	12.0	465	—	100	10	10M
NF-HRW084C-CT	RGBW	5050	84	RGBW	15.0	600	—	100	10	7.5M


LED Neon Flex Series

Side View-L: 11X20

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

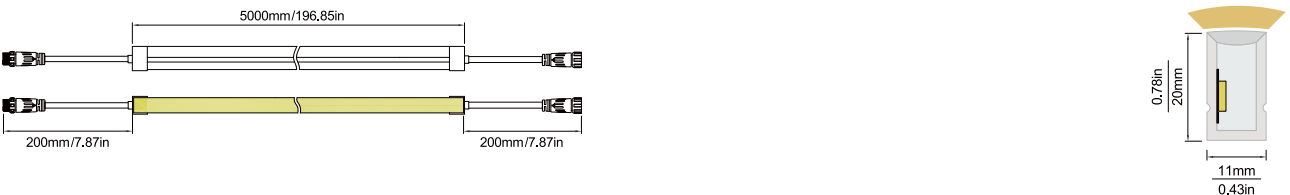


Installation Accessories

JA0031		304SS+6063AL Pop-Up Profile 1000*14.5*17.25mm
JK0020		304SS+6063AL Pop-Up Clip 40*14.5*17.25mm
JA0050		6063 Aluminum Profile 1000*14*22.5mm
JK0049		6063 Aluminum Clip 30*14*22.5mm
JL0005		Flexible Stainless Steel Profile 1000*12.5*19.5mm
JA0121		PVC White Profile 1000* 12.8*10.7mm



Application



Connection Methods

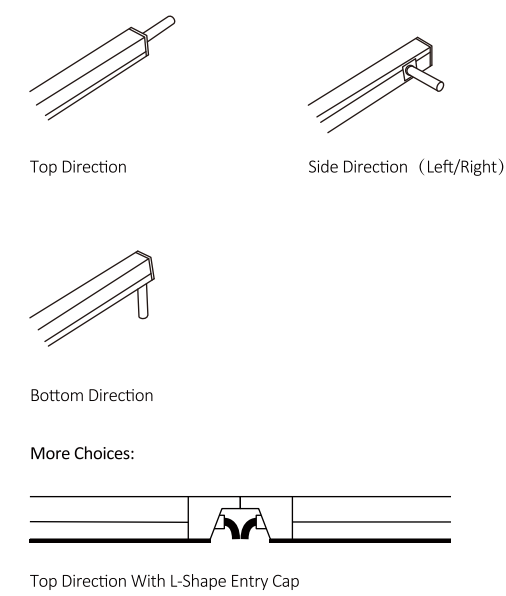

Luminaire Photometric Data

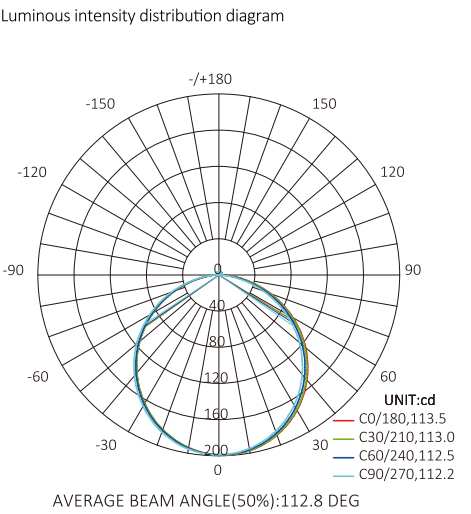

Datasheet

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27140C-F	2700K	2835	140	2600-2800	12.0	730	90	50	10	15M
NF-C30140C-F	3000K	2835	140	2850-3300	12.0	740	90	50	10	15M
NF-C40140C-F	4000K	2835	140	3850-4400	12.0	750	90	50	10	15M
NF-C50140C-F	5000K	2835	140	4800-5400	12.0	750	90	50	10	15M
NF-C65140C-F	6500K	2835	140	5600-7000	12.0	740	90	50	10	15M
NF-CRE140C-F	Red	2835	140	620-625nm	12.0	264	—	50	10	15M
NF-CGR140C-F	Green	2835	140	520-525nm	12.0	400	—	50	10	15M
NF-CBL140C-F	Blue	2835	140	460-465nm	12.0	193	—	50	10	15M
NF-CYE140C-F	Yellow	2835	140	590-595nm	12.0	86	—	50	10	15M
NF-CP140C-F	Pink	2835	140	-	12.0	600	—	50	10	15M
NF-COR140C-F	Orange	2835	140	600-610nm	12.0	303	—	50	10	15M
NF-CTW240C-F	WW-CW	2835	240	2700-6500	2*8	540	90	50	10	12M
NF-HRG070C-F	RGB	5050	70	RGB	12.0	360	—	100	10	10M
NF-HRW070C-F	RGBW	5050	70	RGBW	15.0	540	—	100	12	7.5M

LED Neon Flex Series

Side View-L: 16x15

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications



Installation Accessories

- JA0004

304SS+6063AL Pop-Up Profile
1000*20.5*17.3mm
- JK0006

304SS+6063AL Pop-Up Clip
40*20.5*17.3mm
- JA0038

6063 Aluminum Profile
1000*19*21.5mm
- JK0005

6063 Aluminum Clip
30*18.3*18mm
- JL0004


Flexible Stainless Steel Profile
1000*17.3*16.44mm
- JD0019

End Cap Without Hole
18.2*17.5*11.5mm


Application



Connection Methods

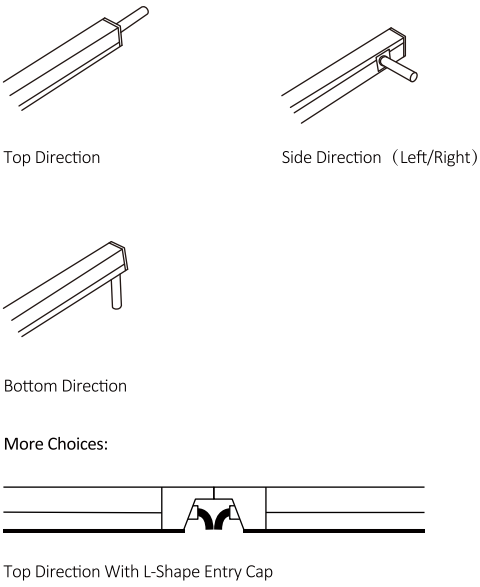

Luminaire Photometric Data

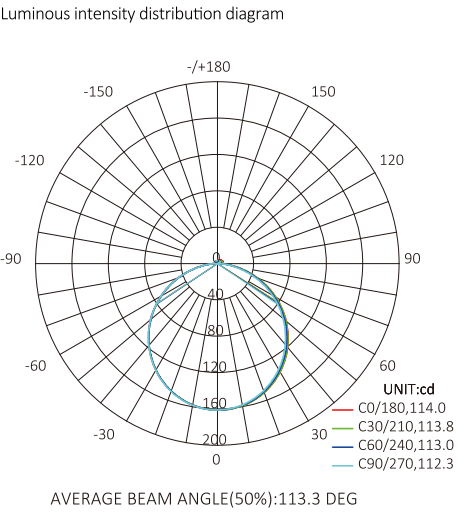

Datasheet

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27140C-CS	2700K	2835	140	2600-2800	12.0	948	90	50	10	15M
NF-C30140C-CS	3000K	2835	140	2850-3300	12.0	960	90	50	10	15M
NF-C40140C-CS	4000K	2835	140	3850-4400	12.0	989	90	50	10	15M
NF-C50140C-CS	5000K	2835	140	4800-5400	12.0	997	90	50	10	15M
NF-C65140C-CS	6500K	2835	140	5600-7000	12.0	1008	90	50	10	15M
NF-CRE140C-CS	Red	2835	140	620-625nm	12.0	288	—	50	10	15M
NF-CGR140C-CS	Green	2835	140	520-525nm	12.0	383	—	50	10	15M
NF-CBL140C-CS	Blue	2835	140	460-465nm	12.0	204	—	50	10	15M
NF-CYE140C-CS	Yellow	2835	140	590-595nm	12.0	630	—	50	10	15M
NF-CP1140C-CS	Pink	2835	140	-	12.0	572	—	50	10	15M
NF-COR140C-CS	Orange	2835	140	600-610nm	12.0	258	—	50	10	15M
NF-CTW240C-CS	WW-CW	2835	240	2700-6500	2*8	631	90	50	10	12M
NF-GRG120C-CS	RGB	3535	120	RGB	12.0	388	—	50	10	10M


LED Neon Flex Series

Side View-M: 8X15

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

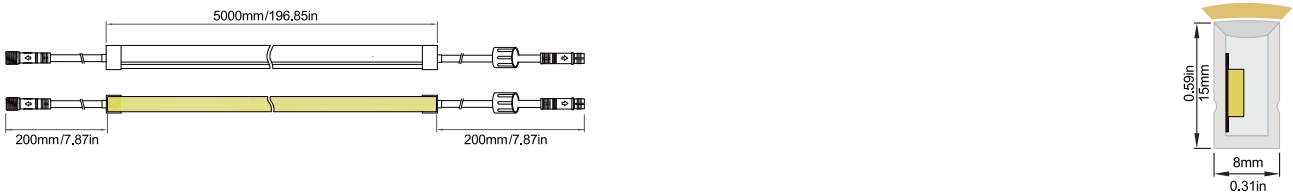


Installation Accessories

JA0040		6063 Aluminum Profile 1000*10*17mm
JK0024		6063 Aluminum Clip 30*10*17mm
JL0007		Flexible Stainless Steel Profile 1000*9*11.2mm
JK0027		304 Stainless Steel Clip 14*10*8mm
JD0035		End Cap Without Hole 16.4*13*9.5mm
DX0092 DX0097		M10 Male&Female Connector 2464 20AWG φ4.0 Cables


Application



Connection Methods

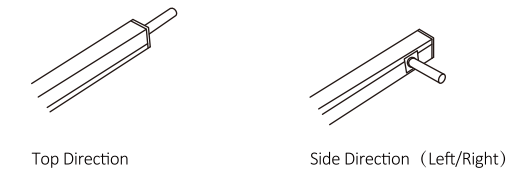

Luminaire Photometric Data

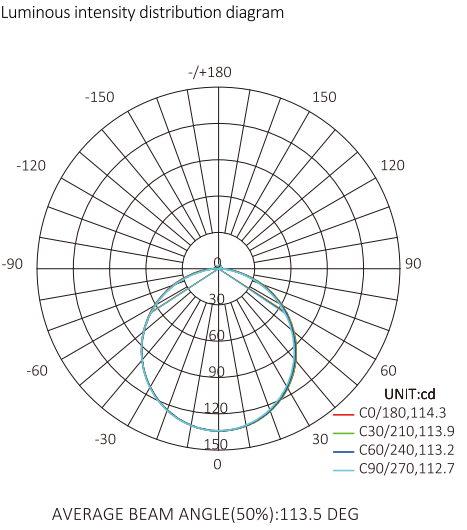

Datasheet



Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27140C-P	2700K	2835	140	2600-2800	10.0	540	90	50	8	12M
NF-C30140C-P	3000K	2835	140	2850-3300	10.0	540	90	50	8	12M
NF-C40140C-P	4000K	2835	140	3850-4400	10.0	542	90	50	8	12M
NF-C50140C-P	5000K	2835	140	4800-5400	10.0	545	90	50	8	12M
NF-C65140C-P	6500K	2835	140	5600-7000	10.0	550	90	50	8	12M
NF-CRE140C-P	Red	2835	140	620-625nm	10.0	169	—	50	8	12M
NF-CGR140C-P	Green	2835	140	520-525nm	10.0	215	—	50	8	12M
NF-CBL140C-P	Blue	2835	140	460-465nm	10.0	112	—	50	8	12M
NF-CYE140C-P	Yellow	2835	140	590-595nm	10.0	368	—	50	8	12M
NF-CPI140C-P	Pink	2835	140	-	10.0	345	—	50	8	12M
NF-COR140C-P	Orange	2835	140	600-610nm	10.0	145	—	50	8	12M
NF-CTW120C-P	WW-CW	2835	120	2700-6500	2*8	364	90	50	8	10M
NF-GRG120C-P	RGB	3535	120	RGB	12.0	240	—	50	8	7.5M


LED Neon Flex Series

Side View-S : 10X10

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

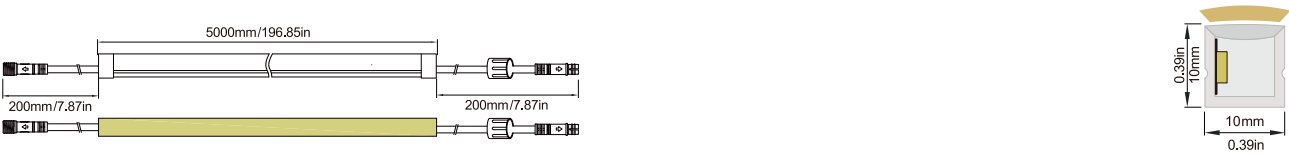


Installation Accessories

JA0026		6063 Aluminum Profile 1000*11.9*14mm
JK0018		6063 Aluminum Clip 30*11.9*14mm
JL0003		Flexible Stainless Steel Profile 1000*10.9*10.03mm
JK0014		304 Stainless Steel Clip 8*11.94*7.5mm
JD0003		End Cap Without Hole 12*12*8mm
JJ0009		K-5905 Glue Transparent 45g/PCS


Application




Luminaire Photometric Data

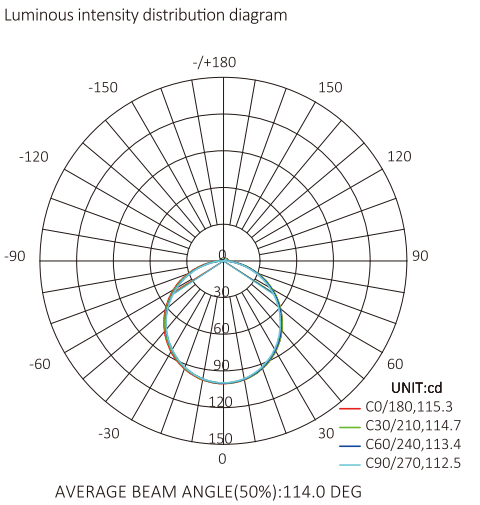

Connection Methods

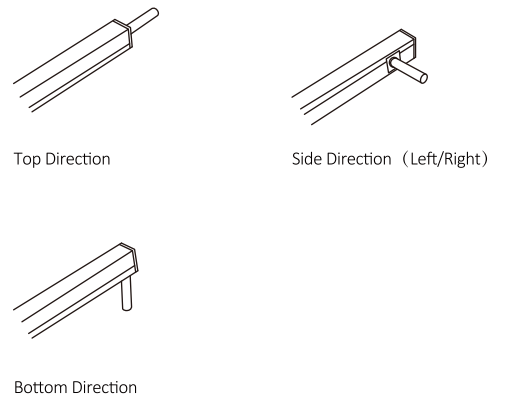

Datasheet



Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27144C-AS	2700K	2835	144	2600-2800	10.0	560	90	41.67	6	12M
NF-C30144C-AS	3000K	2835	144	2850-3300	10.0	570	90	41.67	6	12M
NF-C40144C-AS	4000K	2835	144	3850-4400	10.0	575	90	41.67	6	12M
NF-C50144C-AS	5000K	2835	144	4800-5400	10.0	575	90	41.67	6	12M
NF-C65144C-AS	6500K	2835	144	5600-7000	10.0	568	90	41.67	6	12M
NF-CRE144C-AS	Red	2835	144	620-625nm	10.0	180	—	41.67	6	12M
NF-CGR144C-AS	Green	2835	144	520-525nm	10.0	232	—	41.67	6	12M
NF-CBL144C-AS	Blue	2835	144	460-465nm	10.0	134	—	41.67	6	12M
NF-CYE144C-AS	Yellow	2835	144	590-595nm	10.0	302	—	41.67	6	12M
NF-CPI144C-AS	Pink	2835	144	-	10.0	309	—	41.67	6	12M
NF-COR144C-AS	Orange	2835	144	600-610nm	10.0	166	—	41.67	6	12M
NF-CTW120C-AS	WW-CW	2835	120	2700-6500	2*8	372	90	50	6	10M
NF-GRG120C-AS	RGB	3535	120	RGB	12.0	258	—	50	6	7.5M


LED Neon Flex Series

Side View-S : 6X12

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

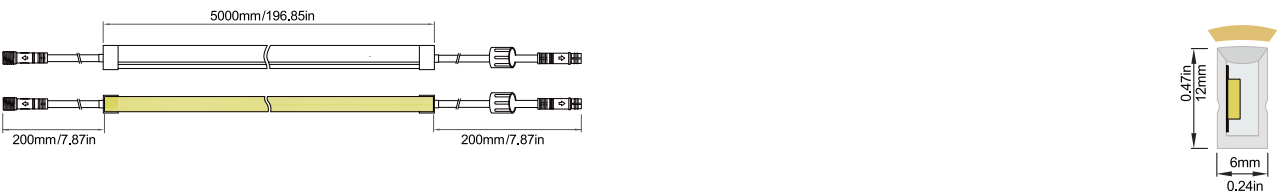


Installation Accessories

JA0202		6063 Aluminum Profile 1000*7.9*13.5mm
JK0048		6063 Aluminum Clip 30*7.9*13.5mm
JL0020		Flexible Stainless Steel Profile 1000*7*12.03mm
JK0062		304 Stainless Steel Clip 20*6.7*10.7mm
JD0058		End Cap Without Hole 13*7.9*14mm
DJ0028		M16 2P IP68 Connector Nylon PA66 17.5Amp

Application




Connection Methods




Luminaire Photometric Data

Luminous intensity distribution diagram

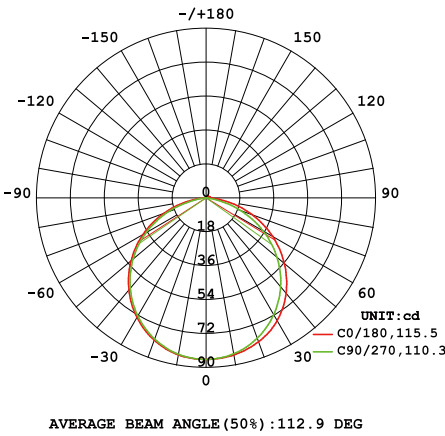

Datasheet



Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27120C-E	2700K	2835	120	2600-2800	8.0	347	90	50	6	12M
NF-C30120C-E	3000K	2835	120	2850-3300	8.0	365	90	50	6	12M
NF-C40120C-E	4000K	2835	120	3850-4400	8.0	382	90	50	6	12M
NF-C50120C-E	5000K	2835	120	4800-5400	8.0	400	90	50	6	12M
NF-C65120C-E	6500K	2835	120	5600-7000	8.0	420	90	50	6	12M
NF-CRE120C-E	Red	2835	120	620-625nm	8.0	100	—	50	6	12M
NF-CGR120C-E	Green	2835	120	520-525nm	8.0	129	—	50	6	12M
NF-CBL120C-E	Blue	2835	120	460-465nm	8.0	68	—	50	6	12M
NF-CYE120C-E	Yellow	2835	120	590-595nm	8.0	220	—	50	6	12M
NF-CPI120C-E	Pink	2835	120	-	8.0	207	—	50	6	12M
NF-COR120C-E	Orange	2835	120	600-610nm	8.0	87	—	50	6	12M
NF-CTW120C-E	WW-CW	2835	120	2700-6500	2*8	219	90	50	6	10M
NF-HRG120C-E	RGB	3535	120	RGB	10.0	144	—	50	6	7.5M


LED Neon Flex Series

Side View-L: 12X20 FA

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

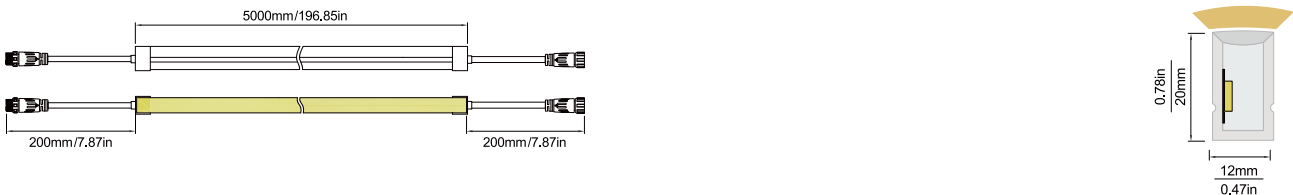


Installation Accessories

JA0002		304SS+6063AL Pop-Up Profile 1000*16.5*19.25mm
JK0003		304SS+6063AL Pop-Up Clip 40*16.5*19.25mm
JA0050		6063 Aluminum Profile 1000*14.2*19.5mm
JK0049		6063 Aluminum Clip 30*14*22.5mm
JL0017		Flexible Stainless Steel Profile 1000*13*18.5MM
JK0061		304 Stainless Steel Clip 20*13.42*11.25mm


Application



Connection Methods

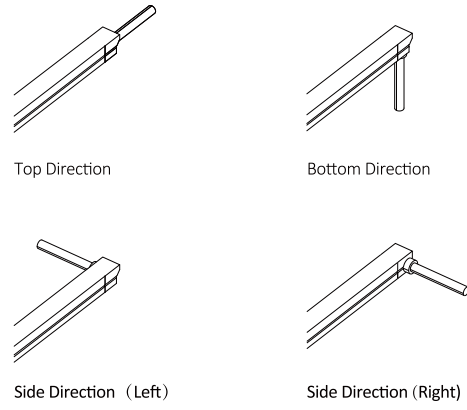

Luminaire Photometric Data

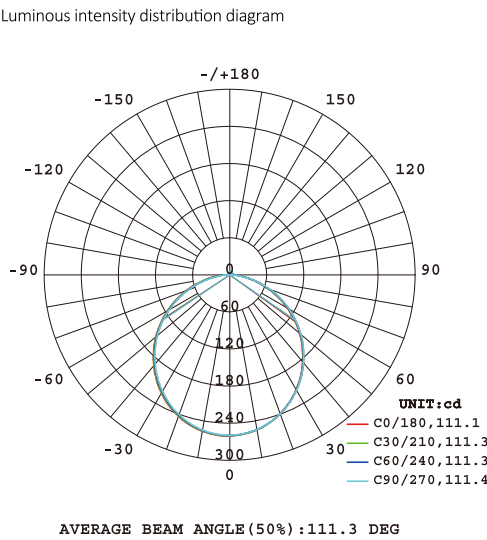

Injection Molded Integrated End Cap & Cable



Datasheet

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27140C-FA	2700K	2835	140	2600-2800	12.0	715	90	50	10	15M
NF-C30140C-FA	3000K	2835	140	2850-3300	12.0	725	90	50	10	15M
NF-C40140C-FA	4000K	2835	140	3850-4400	12.0	735	90	50	10	15M
NF-C50140C-FA	5000K	2835	140	4800-5400	12.0	740	90	50	10	15M
NF-C65140C-FA	6500K	2835	140	5600-7000	12.0	735	90	50	10	15M
NF-CRE140C-FA	Red	2835	140	620-625nm	12.0	258	—	50	10	15M
NF-CGR140C-FA	Green	2835	140	520-525nm	12.0	392	—	50	10	15M
NF-CBL140C-FA	Blue	2835	140	460-465nm	12.0	189	—	50	10	15M
NF-CYE140C-FA	Yellow	2835	140	590-595nm	12.0	84	—	50	10	15M
NF-CP1140C-FA	Pink	2835	140	-	12.0	588	—	50	10	15M
NF-COR140C-FA	Orange	2835	140	600-610nm	12.0	297	—	50	10	15M
NF-CTW240C-FA	WW-CW	2835	240	2700-6500	2*8	529	90	50	10	12M
NF-HRG084C-FA	RGB	5050	84	RGB	12.0	353	—	100	10	10M
NF-HRW084C-FA	RGBW	5050	84	RGBW	15.0	530	—	100	12	7.5M


LED Neon Flex Series

3-Face View-Mini: 10X6

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

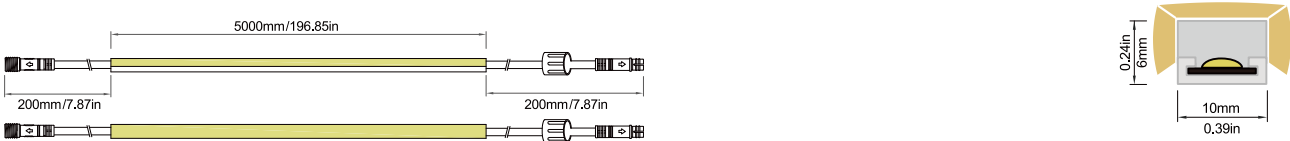

Installation Accessories


JA0039		PC Transparent Profile 1000*12.2*8.5mm
JK0022		PC Transparent Clip 20*12.2*8.5mm
JA0049		6063 Aluminum Profile 1000*12*6.6mm
JJ0009		K-5905 Glue Transparent 45g/PCS
DX0092 DX0097		M10 Male&Female Connector 2464 20AWG φ4.0 Cables
JL0011		Flexible Stainless Steel Profile 1000*10.7*6.64mm

Application




Luminaire Photometric Data


Luminous intensity distribution diagram

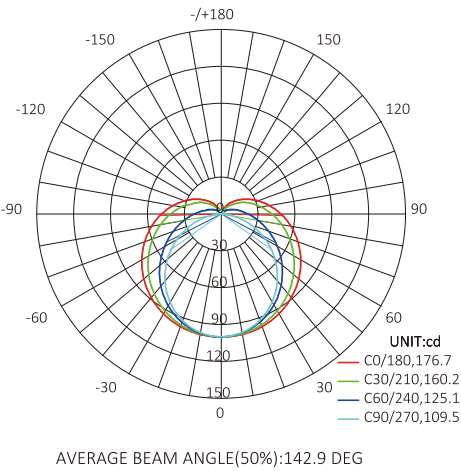

Connection Methods



Datasheet




Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-Z27480C-Q	2700K	COB	480	2600-2800	10.0	680	90	50	8	10M
NF-Z30480C-Q	3000K	COB	480	2850-3300	10.0	685	90	50	8	10M
NF-Z40480C-Q	4000K	COB	480	3850-4400	10.0	690	90	50	8	10M
NF-Z50480C-Q	5000K	COB	480	4800-5400	10.0	690	90	50	8	10M
NF-Z65480C-Q	6500K	COB	480	5600-7000	10.0	700	90	50	8	10M
NF-ZRE480C-Q	Red	COB	480	620-625nm	10.0	238	—	50	8	10M
NF-ZGR480C-Q	Green	COB	480	520-525nm	10.0	306	—	50	8	10M
NF-ZBL480C-Q	Blue	COB	480	460-465nm	10.0	170	—	50	8	10M
NF-ZYE480C-Q	Yellow	COB	480	590-595nm	10.0	390	—	50	8	10M
NF-ZPI480C-Q	Pink	COB	480	-	10.0	350	—	50	8	10M
NF-ZOR480C-Q	Orange	COB	480	600-610nm	10.0	180	—	50	8	10M
NF-ZTW512C-Q	WW-CW	COB	512	2700-6500	2*6	380	90	62.5	8	10M

LED Neon Flex Series

3-Face View-S: 10X10

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.

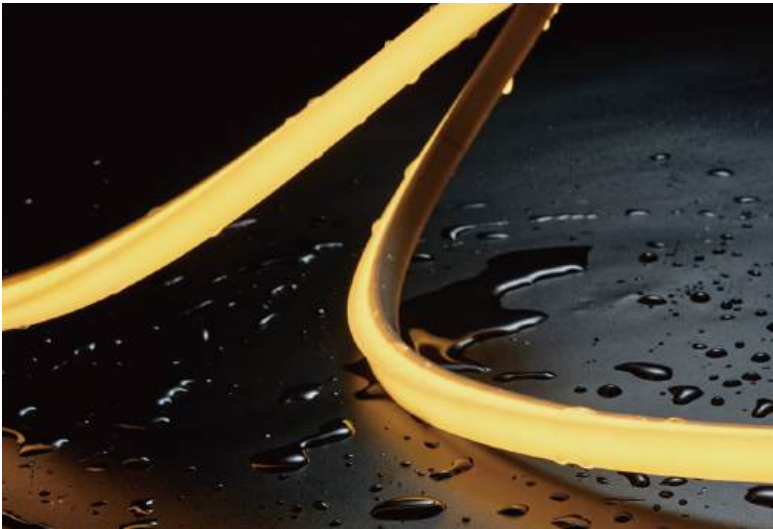

Specifications



Installation Accessories


JA0039		PC Transparent Profile 1000*12.2*8.5mm
JK0022		PC Transparent Clip 20*12.2*8.5mm
JA0026		6063 Aluminum Profile 1000*11.9*14mm
JK0018		6063 Aluminum Clip 30*11.9*14mm
JL0003		Flexible Stainless Steel Profile 1000*10.9*10.03mm
JK0014		304 Stainless Steel Clip 8*11.94*7.5mm

Application




Luminaire Photometric Data

Luminous intensity distribution diagram

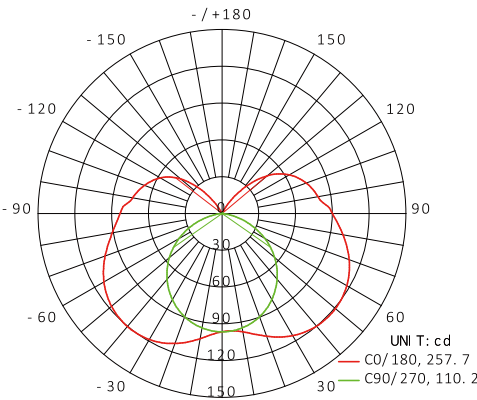


AVERAGE BEAM ANGLE(50%): 183.9 DEG

Connection Methods



Top Direction

Datasheet



Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27140C-A	2700K	2835	140	2600-2800	10.0	820	90	50	8	12M
NF-C30140C-A	3000K	2835	140	2850-3300	10.0	830	90	50	8	12M
NF-C40140C-A	4000K	2835	140	3850-4400	10.0	840	90	50	8	12M
NF-C50140C-A	5000K	2835	140	4800-5400	10.0	840	90	50	8	12M
NF-C65140C-A	6500K	2835	140	5600-7000	10.0	845	90	50	8	12M
NF-CRE140C-A	Red	2835	140	620-625nm	10.0	280	—	50	8	12M
NF-CGR140C-A	Green	2835	140	520-525nm	10.0	360	—	50	8	12M
NF-CBL140C-A	Blue	2835	140	460-465nm	10.0	200	—	50	8	12M
NF-CYE140C-A	Yellow	2835	140	590-595nm	10.0	470	—	50	8	12M
NF-CPI140C-A	Pink	2835	140	-	10.0	480	—	50	8	12M
NF-COR140C-A	Orange	2835	140	600-610nm	10.0	256	—	50	8	12M
NF-CTW120C-A	WW-CW	2835	120	2700-6500	2*8	575	90	50	8	10M
NF-GRG120C-A	RGB	3535	120	RGB	12.0	410	—	50	8	7.5M

LED Neon Flex Series

3-Face View-M: 14x12

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications




Installation Accessories

JA0025		PC Transparent Profile 1000*16*8.97mm
JK0038		PC Transparent Clip 20*16*8.97mm
JA0075		6063 Aluminum Profile 1000*16*15.5mm
JK0039		6063 Aluminum Clip 30*15.95*9.5mm
JL0008		Flexible Stainless Steel Profile 1000*15.3*9.5mm
DX0351 DX0352		M12 Male&Female Connector 0.5mm² φ5.0 Rubber Cables

Application





Connection Methods



Top Direction

Luminaire Photometric Data

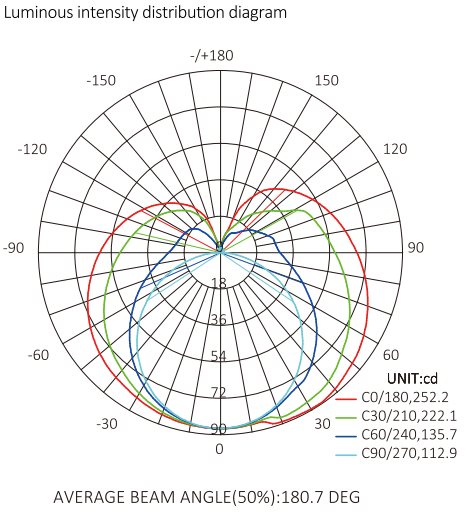

Datasheet

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27240C-S	2700K	2835	240	2600-2800	12.0	825	90	25	10	15M
NF-C30240C-S	3000K	2835	240	2850-3300	12.0	830	90	25	10	15M
NF-C40240C-S	4000K	2835	240	3850-4400	12.0	839	90	25	10	15M
NF-C50240C-S	5000K	2835	240	4800-5400	12.0	840	90	25	10	15M
NF-C65240C-S	6500K	2835	240	5600-7000	12.0	836	90	25	10	15M
NF-CRE240C-S	Red	2835	240	620-625nm	12.0	300	—	25	10	15M
NF-CGR240C-S	Green	2835	240	520-525nm	12.0	380	—	25	10	15M
NF-CBL240C-S	Blue	2835	240	460-465nm	12.0	190	—	25	10	15M
NF-CYE240C-S	Yellow	2835	240	590-595nm	12.0	670	—	25	10	15M
NF-CPI240C-S	Pink	2835	240	-	12.0	630	—	25	10	15M
NF-COR240C-S	Orange	2835	240	600-610nm	12.0	250	—	25	10	15M
NF-CTW240C-S	WW-CW	2835	240	2700-6500	2*10	665	90	50	10	12M
NF-GRG120C-S	RGB	3535	120	RGB	14.0	500	—	50	10	10M
NF-JRW180C-S	RGBW	3535+3014	180	RGBW	16.0	630	—	55.5	10	7.5M
NF-GRG096C-S	RGB	3535	96	Pixel RGB	14.0	480	—	62.5	10	7.5M


LED Neon Flex Series

3-Face View-L: 16x15

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

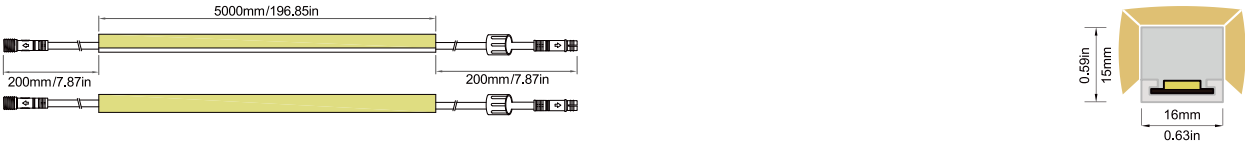


Installation Accessories

JA0175		PC Transparent Profile 1000*19.47*8.38mm
JK0057		PC Transparent Clip 30*19.47*8.38mm
JA0038		6063 Aluminum Profile 1000*19*21.5mm
JK0005		6063 Aluminum Clip 30*18.3*18mm
JL0004		Flexible Stainless Steel Profile 1000*17.3*16.44mm
JK0019		304 Stainless Steel Clip 15*17*8.8mm

Application




Connection Methods




Top Direction

Luminaire Photometric Data

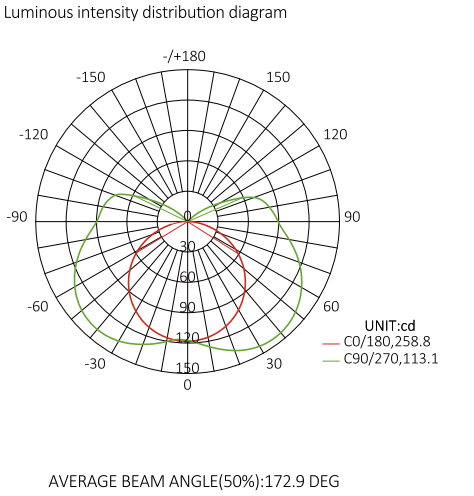

Datasheet



Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27240C-CA	2700K	2835	240	2600-2800	12.0	788	90	25	10	15M
NF-C30240C-CA	3000K	2835	240	2850-3300	12.0	793	90	25	10	15M
NF-C40240C-CA	4000K	2835	240	3850-4400	12.0	802	90	25	10	15M
NF-C50240C-CA	5000K	2835	240	4800-5400	12.0	803	90	25	10	15M
NF-C65240C-CA	6500K	2835	240	5600-7000	12.0	799	90	25	10	15M
NF-CRE240C-CA	Red	2835	240	620-625nm	12.0	286	—	25	10	15M
NF-CGR240C-CA	Green	2835	240	520-525nm	12.0	363	—	25	10	15M
NF-CBL240C-CA	Blue	2835	240	460-465nm	12.0	181	—	25	10	15M
NF-CYE240C-CA	Yellow	2835	240	590-595nm	12.0	640	—	25	10	15M
NF-CPI240C-CA	Pink	2835	240	-	12.0	602	—	25	10	15M
NF-COR240C-CA	Orange	2835	240	600-610nm	12.0	239	—	25	10	15M
NF-CTW240C-CA	WW-CW	2835	240	2700-6500	2*10	635	90	50	10	12M
NF-GRG120C-CA	RGB	3535	120	RGB	14.0	478	—	50	10	10M
NF-HRW096C-CA	RGBW	5050	96	RGBW	16.0	602	—	62.5	12	7.5M
NF-HRW096C-CA	RGBW	5050	96	Pixel RGBW	18.0	458	—	62.5	12	7.5M

FLEXIBLE LED WALL WASHER LIGHT

Adopting PU glue material, it's resistant to yellowing, high temperature, corrosion, weak acid and alkali, and has great flexibility. so that it has strong adhesion, good durability and high reliability. It can replace the traditional hard wall washer light or LED strip. It's small in size, light in weight, flexible and easy to install.



UV
Protected



Waterproof
IP68



Saltwater
Resistant



Resistant
to Solvents

Flexible LED Wall Washer Light


2835-40D-22MM-24V

Adopting PU glue material, it's resistant to yellowing, high temperature, corrosion, weak acid and alkali, and has great flexibility. so that it has strong adhesion, good durability and high reliability. It can replace the traditional hard wall washer light or LED strip. It's small in size, light in weight, flexible and easy to install.




Specifications

* 40LEDs/M

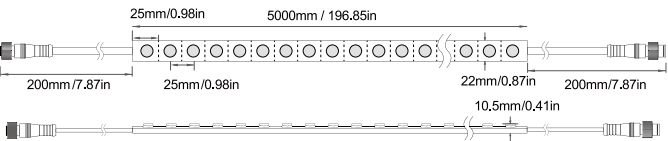


Beam Angle

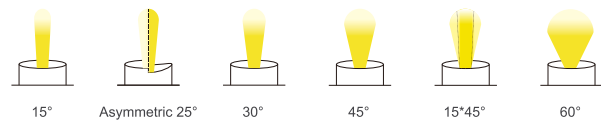


Datasheet

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
XF-C27040C	2700K	2835	40	2600-2800	16	1600	80	25	16	15M
XF-C30040C	3000K	2835	40	2850-3200	16	1610	80	25	16	15M
XF-C40040C	4000K	2835	40	3850-4200	16	1630	80	25	16	15M
XF-C50040C	5000K	2835	40	4850-5250	16	1640	80	25	16	15M
XF-C65040C	6500K	2835	40	6200-6800	16	1620	80	25	16	15M

Installation Accessories

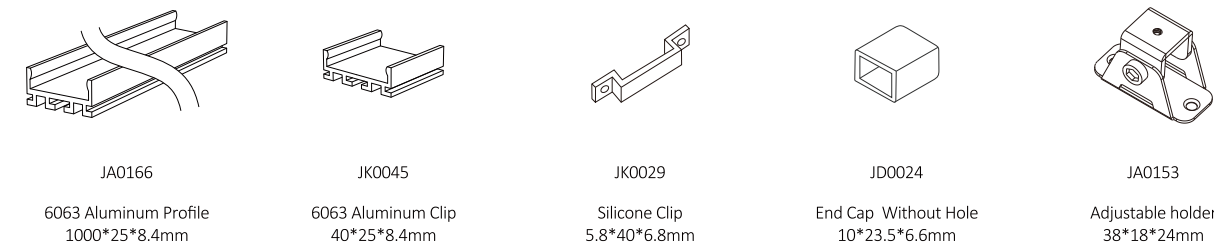

Application



Flexible LED Wall Washer Light


5050CCT-42D-22MM-24V

Adopting PU glue material, it's resistant to yellowing, high temperature, corrosion, weak acid and alkali, and has great flexibility. so that it has strong adhesion, good durability and high reliability. It can replace the traditional hard wall washer light or LED strip. It's small in size, light in weight, flexible and easy to install.




Specifications

* 42LEDs/M

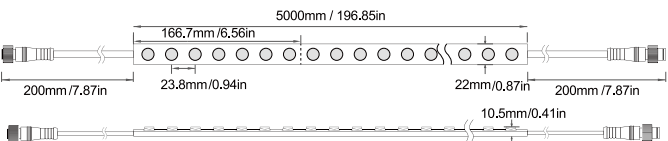


Beam Angle

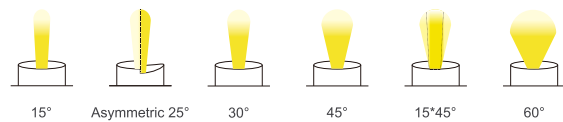

Datasheet

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
XF-HTW042C	WW/CW	5050	42	2700-6500	2*10	1050	80	166.7	16	15M

Installation Accessories

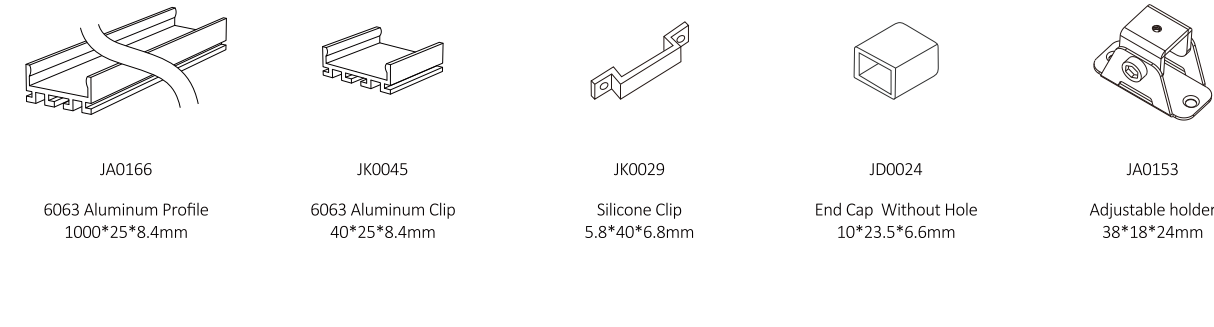

Flexible LED Wall Washer Light


5050RGB-36D-22MM-24V

Adopting PU glue material, it's resistant to yellowing, high temperature, corrosion, weak acid and alkali, and has great flexibility. so that it has strong adhesion, good durability and high reliability. It can replace the traditional hard wall washer light or LED strip. It's small in size, light in weight, flexible and easy to install.




Specifications


* 36LEDs/M

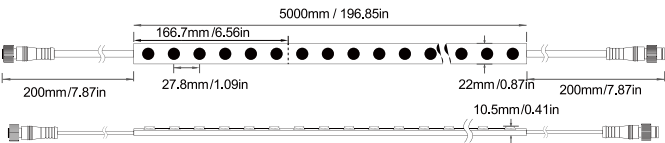

Beam Angle

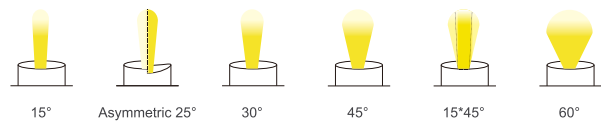


Application



Datasheet

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
XF-HRG036C	RGB	5050	36	RGB	16	580	—	166.7	16	15M

Installation Accessories

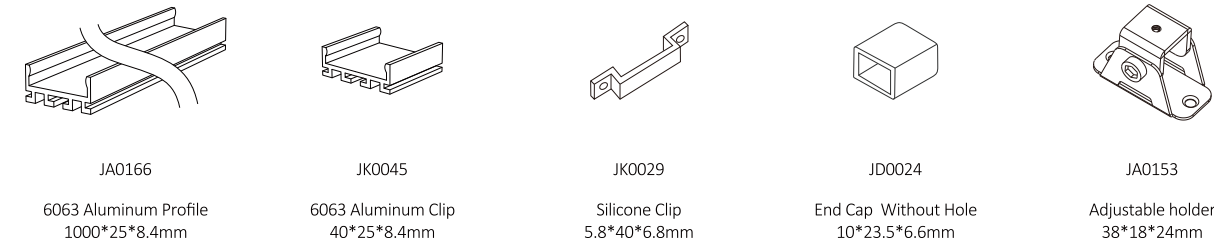

Flexible LED Wall Washer Light


5050RGBW-30D-22MM-24V

Adopting PU glue material, it's resistant to yellowing, high temperature, corrosion, weak acid and alkali, and has great flexibility. so that it has strong adhesion, good durability and high reliability. It can replace the traditional hard wall washer light or LED strip. It's small in size, light in weight, flexible and easy to install.




Specifications


*30LEDs/M

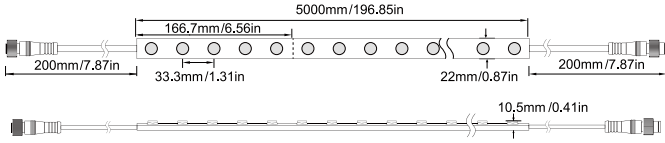

Beam Angle

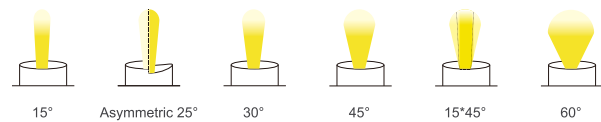


Application



Datasheet

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
XF-HRW030C	RGBW	5050	30	RGBW	18	720	—	166.7	16	15M

Installation Accessories

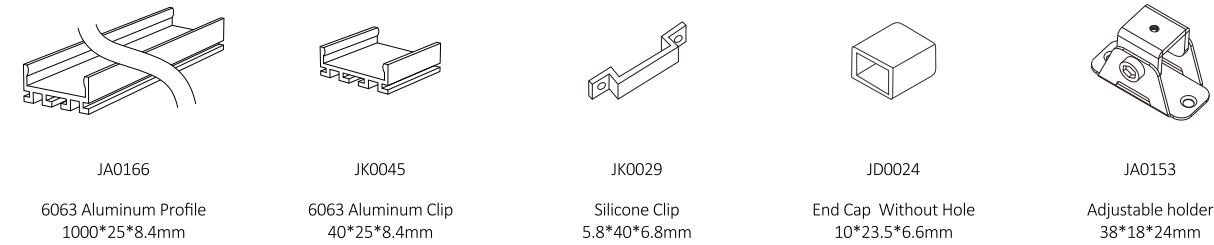

Flexible LED Wall Washer Light


2835-42D-20MM-24V

Adopting PU glue material, it's resistant to yellowing, high temperature, corrosion, weak acid and alkali, and has great flexibility. so that it has strong adhesion, good durability and high reliability. It can replace the traditional hard wall washer light or LED strip. It's small in size, light in weight, flexible and easy to install.




Specifications

* 42LEDs/M

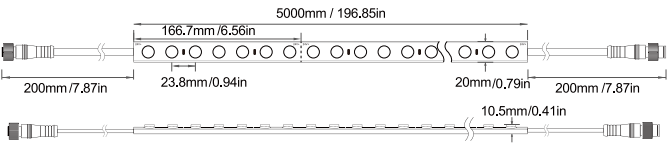


Beam Angle

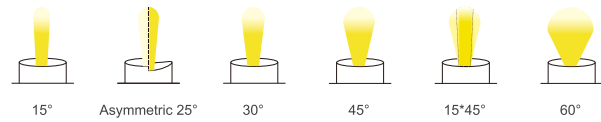

Datasheet


Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
XE-C27042C	2700K	2835	42	2600-2800	18	2320	80	166.7	17.5	15M
XE-C30042C	3000K	2835	42	2850-3200	18	2330	80	166.7	17.5	15M
XE-C40042C	4000K	2835	42	3850-4200	18	2350	80	166.7	17.5	15M
XE-C50042C	5000K	2835	42	4850-5250	18	2350	80	166.7	17.5	15M
XE-C65042C	6500K	2835	42	6200-6800	18	2340	80	166.7	17.5	15M

Installation Accessories




JA0177

6063 Aluminum Profile
1000*26*8mm



JK0029

Silicone Clip
5.8*40*6.8mm



JA0153

Adjustable holder
38*18*24mm

Flexible LED Wall Washer Light


2835-56D-14MM-24V

Adopting PU glue material, it's resistant to yellowing, high temperature, corrosion, weak acid and alkali, and has great flexibility. so that it has strong adhesion, good durability and high reliability. It can replace the traditional hard wall washer light or LED strip. It's small in size, light in weight, flexible and easy to install.




Specifications

* 56LEDs/M

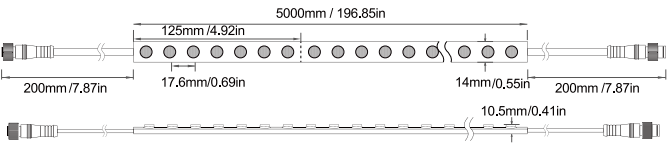


Beam Angle

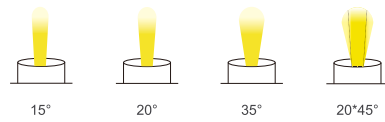

Datasheet


Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
XF-C27056C	2700K	2835	56	2600-2800	10	920	80	125	11	15M
XF-C30056C	3000K	2835	56	2850-3200	10	930	80	125	11	15M
XF-C40056C	4000K	2835	56	3850-4200	10	950	80	125	11	15M
XF-C50056C	5000K	2835	56	4850-5250	10	950	80	125	11	15M
XF-C65056C	6500K	2835	56	6200-6800	10	940	80	125	11	15M

Installation Accessories




JA0176

6063 Aluminum Profile
1000*17*8mm




JA0025

PC Transparent Profile
1000*16*8.97mm



JK0038

PC Transparent Clip
20*16*8.97mm



JK0031

Silicone Clip
5.8*31*5.8mm



JD0026

End Cap Without Hole
10*16.5*6mm



Lumileds LLC

In witness whereof, the parties hereto have approved and executed this License on the dates specified by their duly authorized representatives, where upon it enters into full force and effect.

Licensors: Lumileds LLC DocuSigned by: Jan Paul Teuwen

Sign: Jan Paul Teuwen 2B16B0F353C44F1

Title: CFO

Dated: February 11, 2021

SMD Lumileds Strip

Lumileds is a well-known brand in the field of LED lighting solutions, founded in 1999, the brand has become the world's leading provider of LED lighting solutions with its strong focus on innovation, performance and energy efficiency. EASTFINE was licensed by Lumileds in 2021, and permitted to use the "Lit by Lumileds" Mark to sell and promote products which using Lumileds light sources, and provide quality assurance to our customers.



SMD2835 Series

2835-120D-8MM-24V

Lumileds brand 2835 LED, with good color consistency, high brightness, low power consumption, long life advantages, is the preferred light source of LED SMD strip Light.



SMD2835 Series

2835-140D-10MM-24V

Lumileds brand 2835 LED, with good color consistency, high brightness, low power consumption, long life advantages, is the preferred light source of LED SMD strip Light.




Application



Specifications

* 120LEDs/M

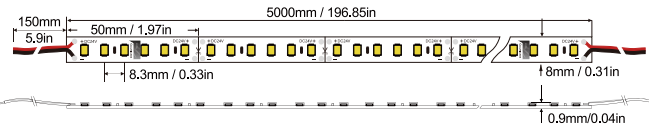

One Bin Only

5M/Roll

DC 24V

CV


12W

90 CRI

12M Max connection

Specifications

* 140LEDs/M

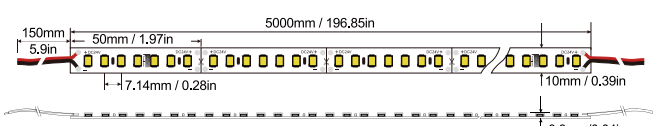

One Bin Only

5M/Roll

DC 24V

CV

12W

90 CRI

12M Max connection

Application



Datasheet

Model No.	SA-C17120C	SA-C22120C	SA-C24120C	SA-C27120C	SA-C30120C	SA-C35120C	SA-C40120C	SA-C50120C	SA-C57120C	SA-C65120C
Colour	1700K	2200K	2400K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
IP20 Lumens ± 10%	800	950	1000	1100	1140	1160	1200	1200	1180	1180

Datasheet

Model No.	SA-C17140C	SA-C22140C	SA-C24140C	SA-C27140C	SA-C30140C	SA-C35140C	SA-C40140C	SA-C50140C	SA-C57140C	SA-C65140C
Colour	1700K	2200K	2400K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
IP20 Lumens ± 10%	1010	1200	1265	1390	1440	1465	1518	1518	1490	1490



Handwriting practice lines consisting of 20 horizontal dashed orange lines.

Handwriting practice lines consisting of 15 horizontal dashed orange lines.

